


Product Specifications


Under Canopy Lighting

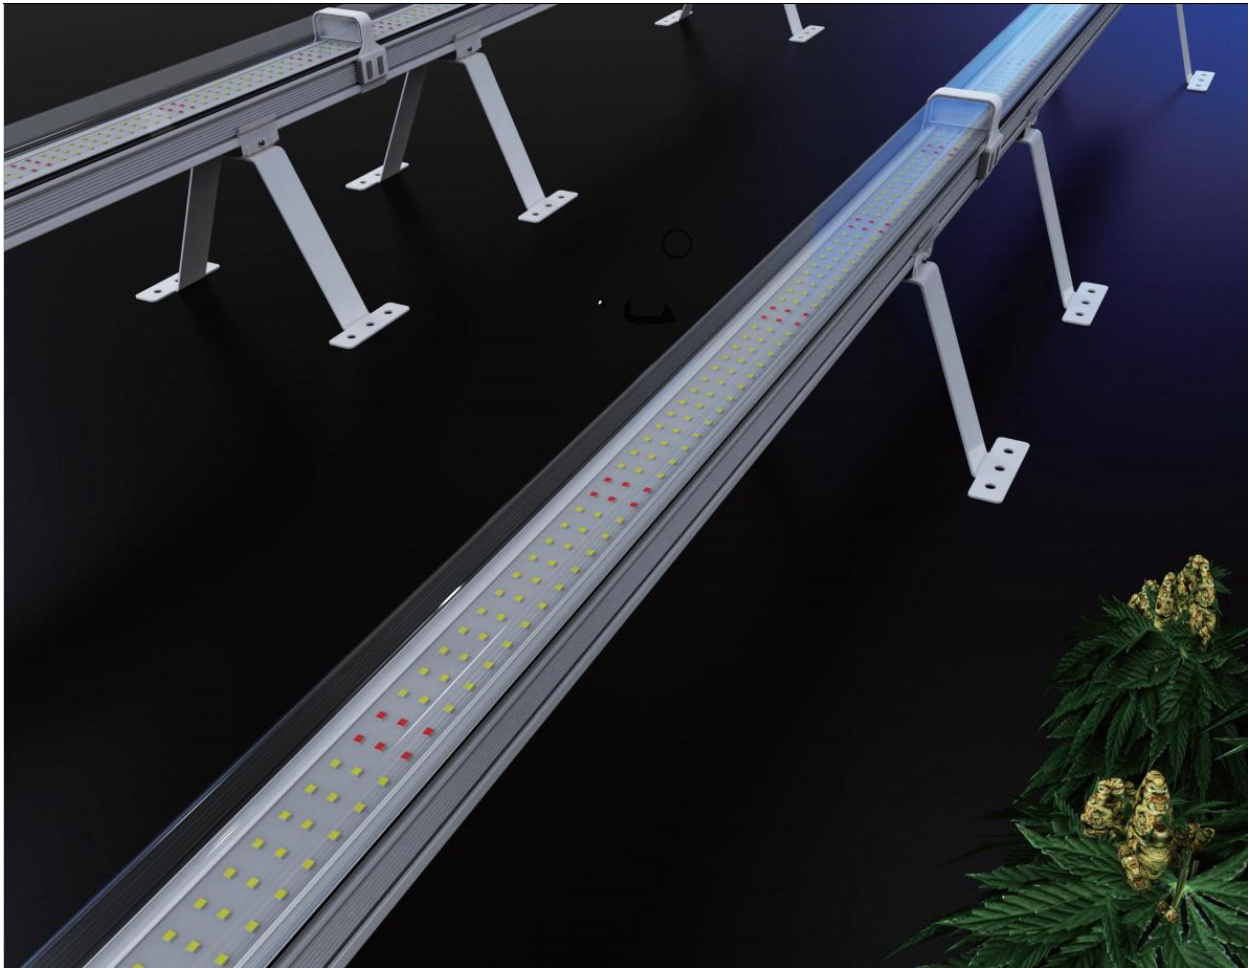

FEATURE

- Environmentally friendly and energy-saving (low-energy LED)
- Dimmable function (0-10V dimming, optimized light intensity)
- Efficient lighting (reduce energy waste, increase yield and health)
- High adaptability (adapt to different planting spaces)

PRODUCT DISPLAY

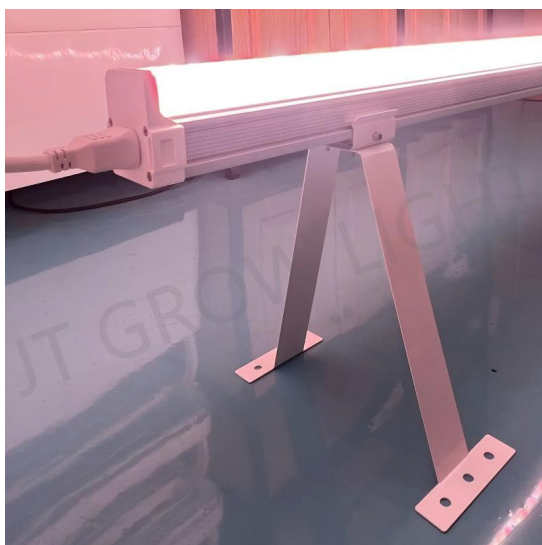


SPECIFICATIONS


Customized spectrum is allowed

Model No.	JT- UCL120	JT- UCL125
Product Name	Under Canopy Lights	
Input Voltage	120-277Vac 50/60Hz	120-277Vac 50/60Hz
Input Current	0.84A/120Vac	1A/120Vac
Wattage	120W	125W
IP Rating	IP65	IP65
LED Typ.	Full spectrum: 460nm+Red660nm	Full spectrum: 460nm+Red660nm
Spectrum	FST 320-800nm	FST 320-800nm
PPF Efficacy	2.8 $\mu\text{mol/J}$	2.8 $\mu\text{mol/J}$
Dimming signal	0-10V Consistent Dimming	0-10V Consistent Dimming
Beam Angle	120°	120°
Dimensions (In.)	1150×64×68mm (45.2'×2.5'×2.7')	120×64×68mm (47.2'×2.5'×2.7')
Product Weight (kg)	2.05kg	2.5kg
Warranty	2-Year	2-Year


SPECTRUM

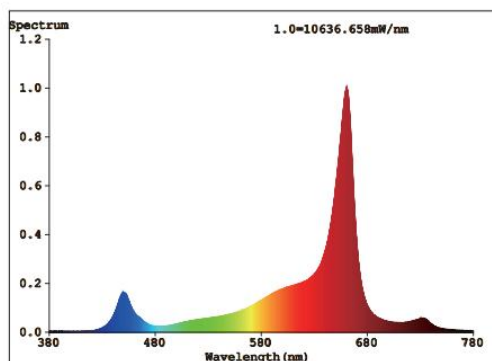

Option 2: White Snake

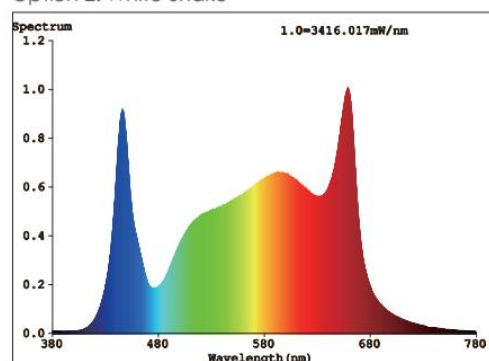

UNDER CANOPY MOUNTING

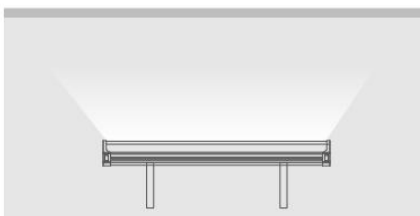

ACCESSORY

End cap for IP65 Fastener Link	L18*W 28*H18mm	2 PCS
Foot rack	H350*W206mm	2 PCS
IP65 Seamless Connection	L50*W28*H18mm	1 PCS
IP65 Waterproof Jumping Power Cable	5*1.0, L500mm	1 PCS/18 sets
IP65 Waterproof Input Power Cable	5*1.0, L1000mm	1 PCS/18 sets
Mounting brackets made of stainless steel (theft protection) for ceiling and wall mounting		2 PCS



INSTALLATION

1. Above Canopy Mounting




ACCESSORY

Suspending Kits		2 PCS
Suspension wire	L300mm	2 PCS
End cap for IP65 Fastener Link	L18*W 28*H18mm	2 PCS
IP65 Seamless Connection	L50*W28*H18mm	1 PCS
IP65 Waterproof Jumping Power Cable	5*1.0, L500mm	1 PCS/18 sets
IP65 Waterproof Jumping Power Cable	5*1.0, L1000mm	1 PCS/18 sets
IP65 Waterproof Input Power Cable	5*1.0, L1000mm	1 PCS/18 sets




LINKABLE WIRING DIAGRAM

Max. wattage per run of splicing fixtures is 16 strips(20 Meters)

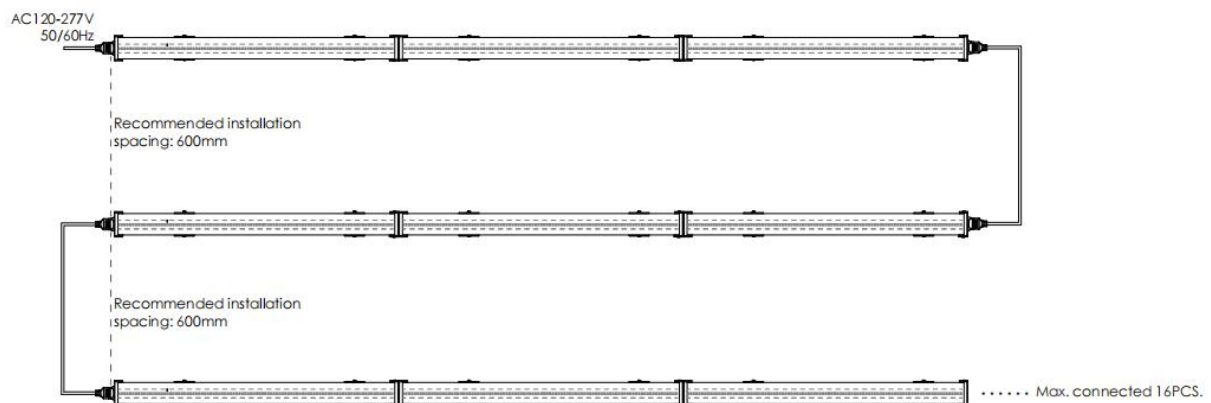

DIMENSIONS(UNIT:MM)

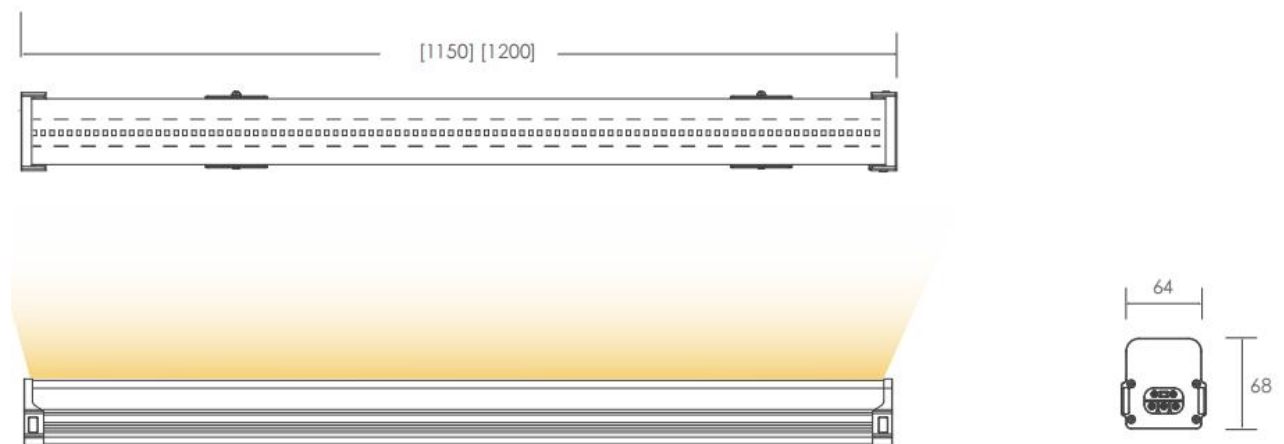

PACKING

Single Size(L*W*H)	N.W/PCS	Box Size(L*W*H)	CTN Size(L*W*H)	PCS/CTN	G.W/CTN
1150×64×68mm	2.05kg	1170x70x73mm	1210x220x240mm	9pcs	19.5kg
1200×64×68mm	2.2kg	1220x70x73mm	1260x220x240mm	9pcs	21.3kg